

20-12-2004

Load-Balanced Route Discovery for Mobile Ad hoc Networks

Mehran Abolhasan

University of Wollongong, mehran.abolhasan@uts.edu.au

Justin Lipman

University of Wollongong, jlipman@uow.edu.au

Tadeusz A. Wysocki

University of Wollongong, wysocki@uow.edu.au

Follow this and additional works at: <https://ro.uow.edu.au/infopapers>



Part of the [Physical Sciences and Mathematics Commons](#)

Recommended Citation

Abolhasan, Mehran; Lipman, Justin; and Wysocki, Tadeusz A.: Load-Balanced Route Discovery for Mobile Ad hoc Networks 2004.

<https://ro.uow.edu.au/infopapers/512>

Research Online is the open access institutional repository for the University of Wollongong. For further information contact the UOW Library: research-pubs@uow.edu.au

Load-Balanced Route Discovery for Mobile Ad hoc Networks

Abstract

This paper presents Flow-Aware Routing Protocol (FARP), a new routing strategy designed to improve load balancing and scalability in mobile ad hoc networks. FARP is a hop-by-hop routing protocol, which introduces a flow-aware route discovery strategy to reduce the number of control overheads propagating through the network and distributes the flow of data through least congested nodes to balance the network traffic. FARP was implemented in Glomosim and compared with AODV. To investigate the load distribution capability of FARP new performance metrics were introduced to measure the data packet flow distribution capability of the each routing protocol. The simulation results obtained illustrate that FARP achieves high levels of throughput, reduces the level of control overheads during route discovery and distributes the network load more evenly between nodes when compared to AODV. This paper also describes a number of Alternative strategies and improvements for the FARP.

Disciplines

Physical Sciences and Mathematics

Publication Details

This conference paper was originally published as Abolhasan, M, Lipman, J and Wysocki, T, Load-Balanced Route Discovery for Mobile Ad hoc Networks, in Proceedings of the 3rd Workshop on the Internet, Telecommunications and Signal Processing (WITSP'04), Adelaide, Australia, 20-22 December 2004.

Load-Balanced Route Discovery for Mobile Ad hoc Networks

Mehran Abolhasan, Justin Lipman and Tadeusz Wysocki
Telecommunications and IT Research Institute (TITR)
University of Wollongong, NSW 2522, Australia
E-mail: mehran@titr.uow.edu.au

Abstract—

This paper presents Flow-Aware Routing Protocol (FARP), a new routing strategy designed to improve load balancing and scalability in mobile ad hoc networks. FARP is a hop-by-hop routing protocol, which introduces a flow-aware route discovery strategy to reduce the number of control overheads propagating through the network and distributes the flow of data through least congested nodes to balance the network traffic. FARP was implemented in Glomosim and compared with AODV. To investigate the load distribution capability of FARP new performance metrics were introduced to measure the data packet flow distribution capability of the each routing protocol. The simulation results obtained illustrate that FARP achieves high levels of throughput, reduces the level of control overheads during route discovery and distributes the network load more evenly between nodes when compared to AODV. This paper also describes a number of Alternative strategies and improvements for the FARP.

I. INTRODUCTION

Following the success of 2nd generation mobile (cellular) telephones in the late 1990's, the demand for wireless communication has continued to grow. Part of this success has been due to the growing demand in Internet type application over the wireless medium. This demand has partly been addressed through the introduction of 2.5G GPRS and more recently the 3G (WCDMA1x) networks. Other solutions becoming widely popular are Wireless Local Area Networks (also known as Wi-Fi Hotspots), such networks are designed to extend the coverage of wired networks by providing network access to mobile users. One shortcoming of the above technologies is their inability to provide a networking solution in environments where a networking infrastructure does not exist. Currently, infrastructure networks such as 2.5G, 3G and Wi-Fi Hotspots exist mainly in metropolitan areas, where consumer demand is high. To address this shortcoming a networking technology is required, which can be easily and cost effectively be configured without the need for a pre-existing infrastructure. One such solution is Ad hoc networking. In Ad hoc networks each end-user node is capable of sending, receiving and routing data packets in a distributed manner. Moreover, such networks can be configured to allow for mobility and perform routing over multiple hops. Such networks are commonly referred to as Mobile Ad hoc Networks (or MANETs).

MANETs are still in their early development stage with the current areas of research spanning across all the levels of the traditional TCP/IP networking model. One interesting area of research in such networks is routing. Designing an efficient routing protocol for MANETs is a non-trivial task. This is primarily due to the dynamic nature of these networks, which re-

quires intelligent strategies that can determine routes with minimum amount of overheads to ensure high levels of scalability. Consequently, researchers have proposed many different types of routing protocols for MANETs. These protocols can be categorised into three groups: proactive, reactive and hybrid routing. Proactive routing was the first attempt at designing routing protocols for MANETs. The early generation proactive protocols such as DSDV[14] and GSR[4] were based on the traditional distance vector and link state algorithm, which were originally proposed for wired networks. These protocols periodically maintain routes to all nodes within the network. The disadvantage of these strategies were the lack of their scalability due to exceedingly large amount of overhead they produced. More recent attempts at reducing control overhead in proactive routing can be seen in protocols such as OLSR[8] and TBRPF[3]. These protocols attempt to reduce the control by reducing the number of re-broadcasting nodes in the network. Reactive (or On-demand) routing protocols attempt to reduce the amount of control overhead disseminated in the network by determining routes to a destination when it is required. This is usually achieved through a two phase route discovery process initiated by a source nodes. The first phase of route discovery starts by the propagation of Route Request (RREQ) packets through the network. The second phase is initiated when a RREQ packet reaches a node, which has a route to the destination or the destination itself, in which case a Route Reply (RREP) packet is generated and transmitted back to the source node. Reactive routing protocols produce significantly lower amount of routing overhead when compared proactive routing protocols when the number of flows in the network are low. However, for large number of flows reactive protocols experience a significant drop in data throughput. This is because routing control packets are usually flooded (globally) throughout the entire network to find a route to the destination. To reduce the global flooding in the network a number of different strategies have been proposed. In LAR[9] and RDMAR[2] the protocols attempt to use prior location knowledge of the destination to reduce the search zone during route discovery. In LPAR[1] a combination of prior location knowledge and unicasting is used to reduce the number of re-broadcasting nodes within a search zone. In AODV[5] the source nodes use Expanding Ring Search (ERS) to search nearby nodes first. Therefore, reducing the number of globally propagating control packets.

Hybrid routing protocols combine both reactive and proactive routing characteristics to achieve high levels of scalability. Generally in hybrid routing protocols, proactive routing is used within a limited region. These regions can be a cluster, a tree or

a zone, which may contain a number of end-user nodes. Reactive routing is used to determine routes, which do not lie within a source node's local region. The idea behind this approach to routing is to allow nearby nodes to collaborate and reduce the number of re-broadcasting nodes. Therefore, during a route discovery only a selected group of nodes within the entire network may rebroadcast packets.

While a great deal of attention has been paid to reducing routing overhead, not much attention has been paid in ensuring a fair distribution of traffic flow (or load) between the nodes. Most routing protocols proposed for MANETs select routes based on the shortest-path which is determined using hop count as the route selection metric. This can lead to congestion or the creation of traffic bottlenecks in the network, which can result in higher levels of packets being dropped in the network and rapid depletion of resources in specific nodes.

Previous work in designing better load distribution within ad hoc networks includes: [11][6][15]. These strategies use routing load as the primary route selection criterion. In [12], the author argues that better load distribution can be achieved by flowing data over multiple routes instead of using a single route. In [7], a combination of a delay metric and hop count is used to select routes during the route discovery phase.

In this paper, we propose Flow-Aware Routing Protocol (FARP), a routing strategy which aims to reduce the amount of control overhead while ensuring a better distribution of traffic between the nodes. In FARP, a utility metric is introduced to restrict the propagation of Route Request (RREQ) packet over nodes with minimum number of active data flows from different source nodes. Therefore, reducing congestion or the creation of bottleneck nodes.

The rest of this paper is organised as follows. In section II, we present describe FARP. section III describes the simulation environment, parameters and metrics used to investigate the performance of FARP with a number of routing protocols. Section IV presents a discussion for our simulation results. Section V presents a number of alternative strategies and improvements for FARP and section VI presents the conclusions of our paper.

II. FLOW-AWARE ROUTING PROTOCOL

FARP employs the hop-by-hop routing strategy used in AODV. However, unlike AODV, FARP attempts to reduce the amount of control overhead while ensuring a better distribution of data traffic. This is achieved by introducing a flow-aware route discovery strategy, which select the nodes with the least number of traffic flows.

In FARP, each node maintains a flow table, which stores a $flow_{ID}$, a flow counter ($flow_c$) and the ID of the previous node from the the data is received (B_{ID}). The $flow_{ID}$ is the concatenation of the source, destination ID's of a particular flow and the node of the previous hop node, which has forwarded the packet (i.e. $flow_{ID} = S_{ID}|B_{ID}|D_{ID}$). This strategies allows each node to independently assign unique flow IDs and identify all data flows travelling through or originating from them. The $flow_c$ stores the number of different unique data flows that pass through each node. This includes the data flow in which the nodes act as an intermediate node and the data flows that they

initiated. Note that the data flow tables maintain information about flows, which are considered as active. To do this, each node updates its data flow counter periodically using timeouts and also reactively when a broken link is reported. Similarly, new flows are added reactively, when a nodes initiates or forwards a data packet which is recorded in the flow table. The following algorithms illustrate the Flow-Add (FA) algorithm.

Algorithm FA

(* The Flow-Add Algorithm *)

1. $Flow_t \leftarrow$ Flow expiration time
2. $Flow_{ID} \leftarrow$ Flow ID for the data packet
3. $Flow_T \leftarrow$ The fwb table
4. $Flow_c \leftarrow$ Flow counter
5. $Flow_A \leftarrow$ Flow Update Flag
6. $S_{ID} \leftarrow$ Source node ID
7. $D_{ID} \leftarrow$ Destination node ID
8. $B_{ID} \leftarrow$ Previous forwarding node ID
9. $Flow_{ID} = S_{ID}|B_{ID}|D_{ID}$
10. $Found \leftarrow False$ A flag used to find Flow ID
11. **for** $i \leftarrow 0, i < Flow_c, i++$
12. **if** $Flow_T[i].Flow_{ID} = Flow_{ID}$
13. $Found \leftarrow True$
14. **break**
15. **if** $Found = True$
16. $Set(Flow_T[i].Flow_t)$
17. **else**
18. $Flow_T[i].Flow_{ID} \leftarrow Flow_{ID}$
19. $Flow_T[i].B_{ID} \leftarrow B_{ID}$
20. $Set(Flow_T[i+1].Flow_t)$
21. $Flow_c++$
22. **if** $Flow_c \geq 1 \ \& \ Flow_A \neq Active$
23. $Flow_A \leftarrow Active$
24. Activate the Flow-Delete-Proactive function

In the FA algorithm, when a node has received or has initiated a data packet, it checks to see if a corresponding $Flow_{ID}$ already exists for that particular flow. If yes, it refreshes the $Flow_t$ for that flow. Otherwise, a new $Flow_{ID}$ is created and a new $Flow_t$ is set. Note that the $flow_t$ is set by adding the current time by a timeout value¹. Moreover, the FA algorithm activates (or re-activates) the FD_P function if there are one or more entries in the flow table.

The following algorithms illustrate the Flow-Delete-proactive (FD_P) and Flow-Delete-reactive (FD_R) strategies respectively.

Algorithm FD_P

(* The Flow-Delete-Proactive Algorithm *)

1. $Time_c \leftarrow$ Current time
2. $Flow_T \leftarrow$ The fwb table
3. $Flow_c \leftarrow$ Flow counter
4. $Flow_t \leftarrow$ Flow expiration time
5. $Flow_A \leftarrow$ Flow Update Flag
6. $Total_{Flows} \leftarrow Flow_c$
7. **while** ($Flow_c > 0$)
8. **for** $i \leftarrow 0, i < Total_{Flows}, i++$
9. **if** $Flow_T[i].Flow_t > Time_c$
10. Delete $Flow_T[i]$
11. $Flow_c--$
12. **if** $Flow_c = 0$
13. $Flow_A \leftarrow InActive$

Algorithm FD_R

(* The Flow-Delete-Reactive Algorithm *)

1. $Flow_T \leftarrow$ Flow Table
2. $B_{ID} \leftarrow$ Intermediate Node ID in the broken link

¹The timeout value can be a constant or it can be calculated dynamically from the rate at which a data packets are received from a particular source

```

3.  $Flow_c \leftarrow \text{fbw counter}$ 
4.  $Total_{Flows} \leftarrow Flow_c$ 
5. for  $i \leftarrow 0, i < Total_{Flows}, i++$ 
6.     if  $Flow_T[i].B_{ID} = B_{ID}$ 
7.         Delete  $Flow_T[i]$ 
8.          $Flow_c --$ 
9. if  $Flow_c = 0$ 
10.     $Flow_A \leftarrow InActive$ 

```

The FD_P algorithm is used to periodically scan the flow table for expired $Flow_{IDs}$. This is achieved by comparing the flow expiration time (i.e. $Flow_t$) for each $Flow_{ID}$ with the current time. If the $Flow_t$ is greater than $Time_c$, then the Flow entries for that particular flow is removed and the $Flow_c$ is decremented. Note that the FD_P Function will be deactivated when the $Flow_c$ is set to zero (i.e. when the flow table is empty).

The FD_R algorithm is used to remove Flow ID's of the data packets travelling over links which have become inactive. The invalid Flow IDs are removed by comparing the ID of the broken link with the ID of the forwarding node (previous hop), then removing the entries in the flow table, which are associated with the broken link. Each time a route entry table is removed, the $Flow_c$ is also decremented. When the flow table scanning phase has been completed, if the flow counter has been set to zero, the flow update flag is then set to inactive. This is done to deactivate the FD_P function.

When a node has data to send and route to the required destination is not available, then route discovery is initiated. The flow-aware route discovery algorithm is outlined below².

Algorithm FSF

(* The Flow-based Selective Flooding algorithm *)

```

1.  $RREQ_{max} \leftarrow$  Maximum number of route request retries
2.  $Flow_\tau \leftarrow \tau$  Data fbw packet threshold
3.  $Flow_F \leftarrow$  Flow metric
4.  $Flow_N \leftarrow 0$  (* No metric to be used *)
5.  $P \leftarrow \{0.125, 0.25, 0.5, 0.75, 1.0\}$  (* Maximum % of data fbw allowed *)
6.  $RREQ_{max} \leftarrow 4$ 
7. for  $i \leftarrow 0, i \neq RREQ_{max}, i++$ 
8.      $Flow_F \leftarrow Flow_\tau \cdot P_i$ 
9.     if  $Flow_F = 0$ 
10.         $Flow_F \leftarrow 1$ 
11.     Forward_RREQ( $Flow_F$ )
12.     wait for reply
13.     if  $Route = found$ 
14.         break loop
15.         initiate data transmission
16. if  $Route = not\ found$ 
17.     Forward_RREQ( $Flow_N$ )
18.     wait for reply
19.     if  $Route = found$ 
20.         initiate data transmission
21.     else
22.         return route not found

```

In the FSF algorithm, the source node begins by calculating a Flow metric ($Flow_F$), which states the maximum number of flows allowed for each node to be able to rebroadcast the RREQ packet. Therefore, each node only rebroadcasts a RREQ packet if the number of flows it handles is less than the number specified in $Flow_F$ (i.e. when $flow_c < Flow_F$). In the FSF algorithm four different levels (i.e. P) of data flow can be selected to calculate the flow metric. During each route request retry this value is increased until $i = RREQ_{max}$. If the

²we refer to this algorithm as Flow-based Selective Flooding (FSF)

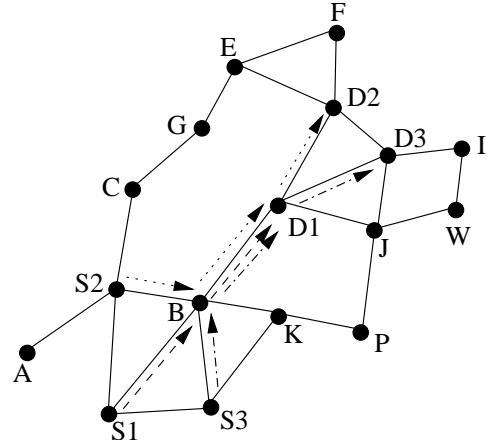


Fig. 1. Data packet fbw using SP routing only

route to the destination is still not found, then source node then transmits a RREQ without a Flow metric (i.e. $Flow_N$), which allows all intermediate nodes to rebroadcast. If the source node determines more than one route to the required destination, it uses the one with the least number of flows and the shortest path. Furthermore, if two routes are found with identical number of flows and hops (which have also least number of flows and hops), then the preferred route is randomly selected.

When a source node has data to send, and a fresh (or active) route already exists or has been determined through a route discovery. Then a $Flow_{ID}$ is created and stored, and the data is forwarded to the next hop. Each forwarding node then creates their own flow IDs (as described previously) and continues forwarding the data packets. This process continues (including at the destination node) until the destination node is reached. Furthermore, each consecutive data packet is used to update the lifetime of each flow ID (if the flow ID already exists).

To illustrate how the FSF algorithm works. Assume that $Flow_\tau = 1$ and $S1, S2$ and $S3$ (see Figure 1) want to send data to $D1, D2$ and $D3$. Using shortest path (SP) routing, all data packets travel through node B and $D1$. Thus creating possible performance bottlenecks at these nodes. In FSF (see Figure 2), the route discovery strategy uses a combination of data flow restriction and SP routing to distribute the packets through nodes C, B and K , instead of through node B only (as was the case in Figure 1). As a result, $FARP$ ensures a better distribution of data traffic than using pure SP routing.

To illustrate how $FARP$ can reduce the number of control packets. Assume that S (see Figure 3) wants to send data to D . In this scenario, under SP routing the route discovery phase results in the transmission of 15 RREQ packets (i.e. all nodes broadcast). However, in $FARP$, only 6 nodes broadcast the RREQ packet. Thus, a control overhead reduction of 60% is achieved. In scenarios where the number of nodes and traffic level is high, it is expected that $FARP$ will experience a significant drop in the number of control packets when compared to other SP-based on-demand routing protocols such as AODV. In section IV, $FARP$ is compared with AODV using simulation studies performed over a densely populated mobile ad hoc network, with multiple numbers of flows.


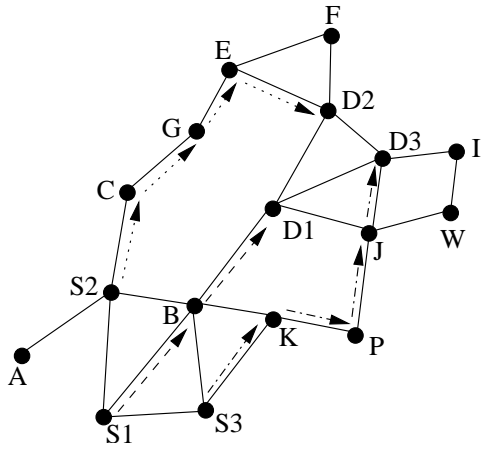


Fig. 2. Data packet fwb using FSF

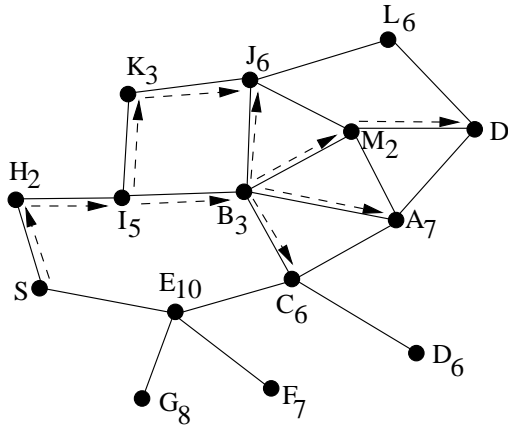

Note in X_Z , X represents the node ID and Z is the number of flows

Fig. 3. Illustration of control overhead reduction in FARP

III. SIMULATION MODEL

This section describes the scenarios and parameters used in simulation studies performed for FARP. It also describes the performance metrics used to compare FARP with a number of other existing routing strategies.

A. Simulation Environment and Scenarios

The GloMoSim[10] simulation package was chosen to run the simulations. GloMoSim is an event driven simulation tool designed to carry out large simulations for mobile ad hoc networks. The simulations were performed for 10, 20 and 100 node networks, migrating in a 1000m x 1000m area. IEEE 802.11 DSSS (Direct Sequence Spread Spectrum) was used with maximum transmission power of 15dbm at a 2Mb/s data rate. In the MAC layer, IEEE 802.11 was used in DCF mode. The radio capture effects were also taken into account. Two-ray path loss characteristics was considered as the propagation model. The antenna height was set to 1.5m, the radio receiver threshold was set to -81 dbm and the receiver sensitivity was set to -91 dbm according to the Lucent wavelan card[13]. Random way-point mobility model was used with the node mobility ranging from 0 to 20m/s and pause time was set to 0 seconds

TABLE I
FARP SIMULATION PARAMETERS

Flow Timeout	3s
Flow Expiration Time	2s
Flow Threshold	8
RREQ Retry Times	6

for continuous mobility. The simulations ran for 200s³ and each simulation was averaged over eight different simulation runs using different seed values.

Constant Bit Rate (CBR) traffic was used to establish communication between nodes. Each CBR packet was contained 512 Bytes and each packet were at 0.25s intervals. The simulation was run for 5, 10, 20 and 40 different client/server pairs⁴ and each session begin at different times and was set to last for the duration of the simulation.

The FARP routing protocols was implemented on the top of the AODV algorithm. Table I illustrates the simulation parameters used for FARP. Note that the Flow Timeout represents the timeout interval at which the flow table entries are updated. The Flow Expiration Time represents the lifetime of each flow. The Flow Threshold is used to assume a maximum number of flows at each node. This is used in the FSF algorithm. The RREQ Retry Times represents the number of times a source can initiate a route discovery before the destination is seen as unreachable.

B. Performance Metrics

The performance of each routing protocol is compared using the following performance metrics.

- Packet Delivery Ratio (PDR)
- Control (O/H)
- End-to-End Delay
- Total Flows per Node (TFN)

PDR is the Ratio of the number of number of packets received by the destination to the number of packets sent by the source. Control overhead (O/H) presents the number of control packets transmitted through the network. The End-to-End Delay represents the average delay experienced by each packet when travelling from the source to the destination. The Total Flows per Node (AFN) represents the total number of data flows handled by each node in the network for the complete duration of the simulation. The above metrics where taken for different values of pause time.

IV. RESULTS

This sections presents the results obtained for FARP and AODV, and provides a performance comparison between these protocols.

³We kept the simulation time lower due to a very high execution time required for the 40 Flow scenario

⁴Note that the terms Client/Server, src/dest and Flows are used interchangeably

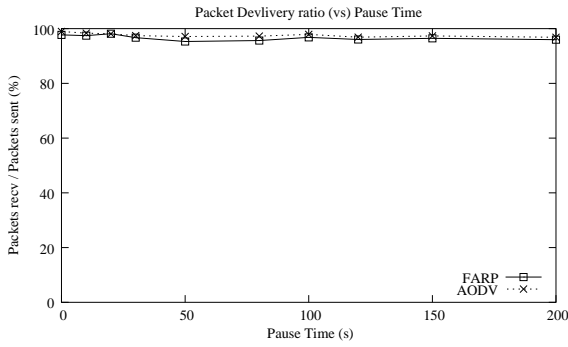


Fig. 4. PDR: 20 Nodes and 10 Flows

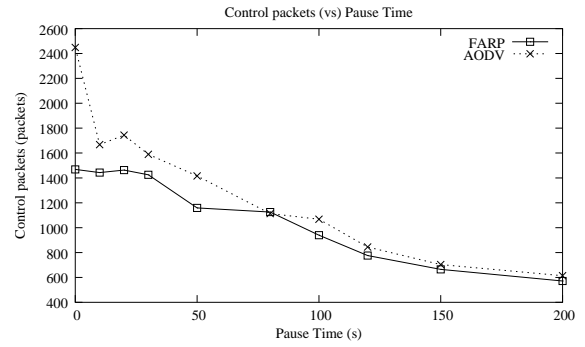


Fig. 6. O/H: 20 Nodes and 10 Flows

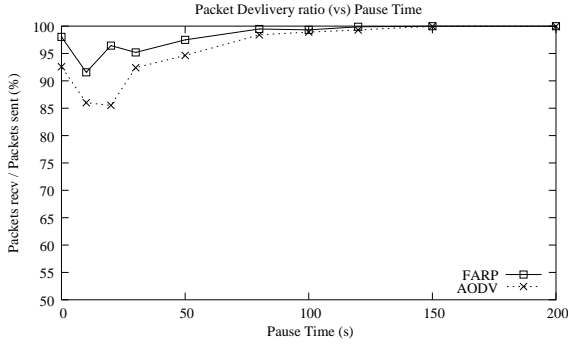


Fig. 5. PDR: 100 Nodes and 50 Flows

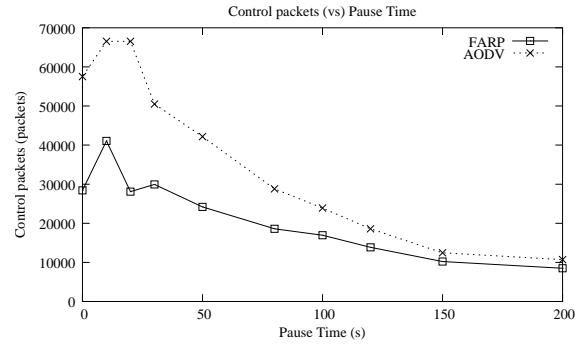


Fig. 7. O/H: 100 Nodes and 50 Flows

A. Packet Delivery Ratio

Figure 4 and 5 illustrate the PDR results obtained for the 20 and 100 node scenarios. These figures illustrate the packet delivery performance of AODV and FARP in a small to medium sized mobile ad hoc network. In the 20 nodes scenarios both FARP and AODV achieve over 98% PDR. However, in the 100 node scenario it can be seen that FARP achieves a higher level of packet delivery than AODV when node mobility is high (i.e. for small pause times). This is because FARP reduces the probability of establishing routes over bottleneck (or saturated nodes). Therefore, the data packets would have a better chance of reaching the required destination in FARP than in AODV. Furthermore, FARP introduces a more selective approach to flooding than AODV. This means that not every node in the network would rebroadcast control packets. Hence, there is often less channel contention between nodes and smaller chance of packets being lost due to interference and buffer overflows when compared to pure flooding.

B. Control Packets

Figure 6 and 7 illustrate the number of control packets introduced into the network for the 20 and 100 node scenarios respectively. In both scenarios it can be seen that FARP produces fewer control packets than AODV. This is more evident when mobility is high. This is because in high mobility both protocols initiate more route discoveries due to more frequent route failures. However, in FARP each route discovery may result in fewer number of control packet rebroadcasts than AODV, due to restriction of flooding over nodes which have fewer flows, which cuts down the number of rebroadcasting nodes when compared to AODV.

C. Delays

Figure 8 and 9 illustrate the end-to-end delay introduced for the 20 and 100 node network scenarios respectively. In the 20 node scenario, both AODV and FARP produce similar levels of end-to-end delay. This is because the amount of traffic introduced into the network is lower than the available bandwidth and the capacity of each node (i.e. no long queue at each node). In the 100 node network with 50 flows FARP achieves significantly lower end-to-end delay than AODV when mobility is high. This is because AODV produces significantly more control overheads than FARP (as described previously in the control overhead results), which increases channel contention between nodes and may increase the time at which each data packet spends in buffers before they are transmitted.

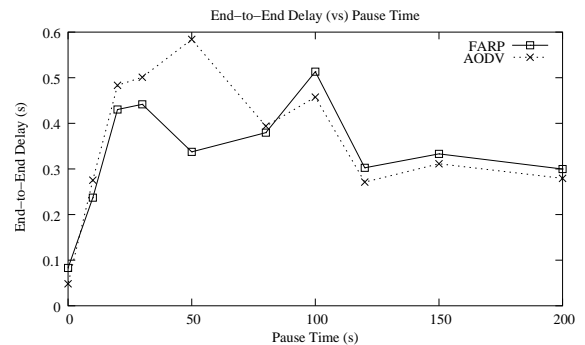


Fig. 8. Delays: 20 Nodes and 10 Flows

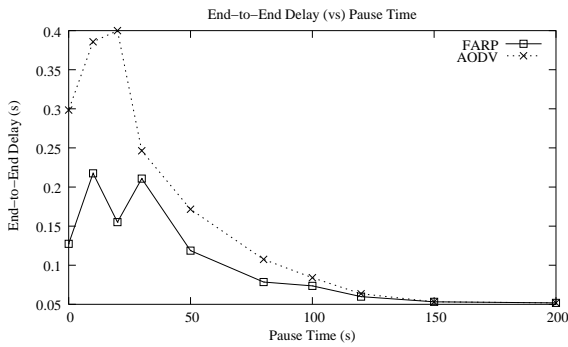


Fig. 9. Delays: 100 Nodes and 50 Flows

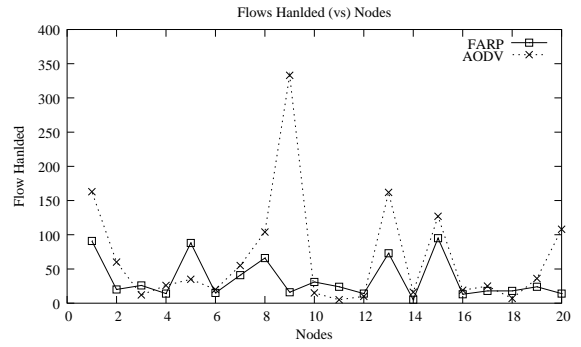


Fig. 11. TFN: 20 Nodes and 10 Flows

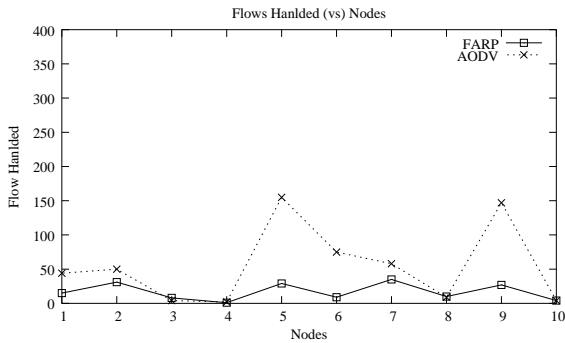


Fig. 10. TFN: 10 Nodes and 5 Flows

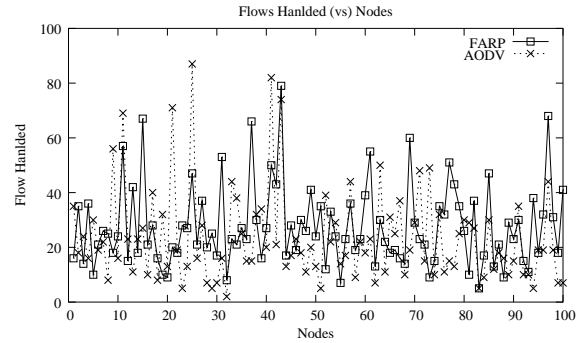


Fig. 12. TFN: 100 Nodes and 50 Flows

D. Flow Distribution

Figure 10, 11 and 12 illustrates the number of different flows handled by each node for zero pause time (i.e. constant node mobility) for the entire duration of the simulation. In the 10 node and 20 node scenario, FARP produces significantly better flow distribution than AODV. This can be seen by the flatness of the curves. In the FARP, the total number of flows at each node varies between 10 to 40 for the 10 node scenario, and 10 to 90 flows for the 20 node scenario. However, in AODV the flows vary between 0 to 150 for the 10 node scenario and 0 to 340 for the 20 node scenario. Hence, there are larger spikes in the AODV graph than in FARP. This indicates that in FARP flows are more evenly distributed than AODV. In the 100 node scenario, the flow distribution achieved in AODV and FARP are more closely than the other less dense scenarios. This is because each node has a higher probability of handling data packets due to the larger traffic density. However, with a close observation of the 100 node graph it can be seen that AODV still experiences the largest variation in flow distribution. For example, the smallest flow count experienced by a node in AODV is close to 0 and the largest is around 90, whereas in FARP the smallest value is close to 8 and the largest is around 78 flows.

V. ALTERNATIVE STRATEGIES AND IMPROVEMENTS

A. Dynamic Flow Threshold Selection

In FSF algorithm, the flow threshold (The limit for the number of flows allowed at each node) was chosen as a simulation parameter. Therefore, each node in our simulations used a static value for the flow threshold. The disadvantage of a static flow threshold is that it may not always allow for the best flow distribution in the network. To make more accurate prediction of

flow limits and better flows distribution, each node must make these decisions dynamically based on the current conditions of the network. One way to calculate the flow threshold dynamically is through the use and exchange of neighbour flow information. In this strategy, each node exchange flow information with their neighbouring nodes (using hello packets) and calculates an average flow per neighbour and the maximum number of flows, which can be experienced by each node at each particular region. Using this information the first few RREQ propagation can be restricted to nodes, which are handling average or lower levels of flows.

B. Rate Adaptive Flow Timeout Selection

In our FARP simulations, the flows that are not refreshed every 2 seconds or less are deleted from the flow table. The disadvantage of this is different applications may be transmitting data at different rates. Therefore, by assigning a static Flow Timeout, the flow table may be storing each flow ID for a longer or shorter time than it is required. To overcome this, the Flow Timeout value can be set by observing the rate at which data packets arrive at each node and assigning a timeout value, which closely matches the expected arrival time.

VI. CONCLUSIONS

In this paper we introduced a new routing strategy for mobile ad hoc network. This routing strategy is referred to as Flow Aware Routing Protocol (FARP). In FARP, a new route discovery strategy is introduced, which uses the flow information kept at each node to reduce the number of control packet while ensuring better distribution of data packets between the nodes in

the network. This is achieved by restricting the RREQ retransmission over the nodes, which have the least number of flows. We implemented FARP on the top of AODV and compared their performance by simulations. Our results show that FARP reduces the number of control packets transmitted through the network, while achieving better data flow distribution in the network. In the future, we plan to investigate the performance of FARP over large network with high levels of mobility.

REFERENCES

- [1] Mehran Abolhasan, Tadeusz Wysocki, and Eryk Dutkiewicz. LPAR: An Adaptive Routing Strategy for MANETs. In *Journal of Telecommunication and Information Technology*, pages 28–37, 2/2003.
- [2] George Aggelou and Rahim Tafazolli. RDMAR: A bandwidth-efficient routing protocol for mobile ad hoc networks. In *ACM International Workshop on Wireless Mobile Multimedia (WoWMoM)*, pages 26–33, 1999.
- [3] B. Bellur, R.G. OGIER, and F.L. Templin. Topology broadcast based on reverse-path forwarding routing protocol(tbrpf). In *Internet Draft, draft-ietf-manet-tbrpf-06.txt, work in progress*, 2003.
- [4] T-W. Chen and M. Gerla. Global State Routing: A New Routing Scheme for Ad-hoc Wireless Networks. *Proc. IEEE ICC*, 1998.
- [5] S. Das, C. Perkins, and E. Royer. Ad Hoc On Demand Distance Vector (AODV) Routing. In *Internet Draft, draft-ietf-manet-aodv-11.txt, work in progress*, 2002.
- [6] H. Hassanein and A. Zhou. Routing with load balancing in wireless ad hoc networks. In *Proceedings of ACM MSWiM, Rome, Italy, July*, 2001.
- [7] V. Wong J.-H. Song and V. Leung. Load-aware on-demand routing (laor) protocol for mobile ad hoc networks. In *IEEE Vehicular Technology Conference (VTC-Spring), Jeju, Korea, pp.1753-1757, April*, 2003.
- [8] P. Jacquet, P. Muhlethaler, T. Clausen, A. Laouiti, A. Qayyum, and L. Viennot. Optimized link state routing protocol for ad hoc networks, ieeenmic pakistan. 2001.
- [9] Yong-Bae Ko and Nitin H. Vaidya. Location-Aided Routing (LAR) in Mobile Ad Hoc Networks. In *Proceedings of the Fourth Annual ACM/IEEE International Conference on Mobile Computing and Networking (Mobicom'98)*, Dallas, TX, 1998.
- [10] UCLA Parallel Computing Laboratory and Wireless Adaptive Mobility Laboratory. Glomosim scalable simulation environment for wireless and wired network systems. In <http://pcl.cs.ucla.edu/projects/glomosim/>, 2003.
- [11] S.J. Lee and M. Gerla. Dynamic load-aware routing in ad hoc networks. In *Proceedings of ICC 2001, Helsinki, Finland, June 2001*, 2001.
- [12] S.J. Lee and M. Gerla. Smr: Split multipath routing with maximally disjoint paths in ad hoc networks. In *Proceedings of ICC 2001, Helsinki, Finland, June 2001*, 2001.
- [13] Lucent. Orinoco pc card. In <http://www.lucent.com/orinoco>, 2003.
- [14] C.E. Perkins and T.J. Watson. Highly Dynamic Destination Sequenced Distance Vector Routing (DSDV) for Mobile Computers. In *ACM SIGCOMM'94 Conference on Communications Architectures*, London, UK, 1994.
- [15] K. Wu and J. Harms. Load-sensitive routing for mobile ad hoc networks. In *Proceedings of IEEE ICCCN'01, Scottsdale, AZ, U.S., October*, 2001.