

1-1-2009

Motion capture in robotics review

Matthew Field

University of Wollongong, field@uow.edu.au

David A. Stirling

University of Wollongong, stirring@uow.edu.au

Fazel Naghdy

University of Wollongong, fazel@uow.edu.au

Zengxi Pan

University of Wollongong, zengxi@uow.edu.au

Follow this and additional works at: <https://ro.uow.edu.au/engpapers>



Part of the [Engineering Commons](#)

<https://ro.uow.edu.au/engpapers/608>

Recommended Citation

Field, Matthew; Stirling, David A.; Naghdy, Fazel; and Pan, Zengxi: Motion capture in robotics review 2009, 1697-1702.

<https://ro.uow.edu.au/engpapers/608>

Motion capture in robotics review

Matthew Field, David Stirling, Fazel Naghdy
School of Electrical, Computer
and Telecommunications Engineering
University of Wollongong
NSW, Australia
Email: {mf91, stirling, fazel}@uow.edu.au

Zengxi Pan
School of Mechanical, Materials
and Mechatronics Engineering
University of Wollongong
NSW, Australia
Email: zengxi@uow.edu.au

Abstract—This survey reviews motion capture technologies and the current challenges associated with their application in robotic systems. Various sensor systems used in current literature are introduced and evaluated based on the relative strengths and weaknesses. Some research problems pursued with these sensors in robotics are reviewed and application areas are discussed. Significant methodologies in analysing the sensor data are discussed and evaluated based on the perceived benefits and limitations. Finally, results from experimentation with an inertial motion capture system are shown based on clustering and segmentation techniques.

I. INTRODUCTION

Motion tracking is a vital component of developing intelligent autonomous robots. A robot agent must be able to perceive human motion in order to interact, co-operate, or imitate in an intelligent manner. In recent years tracking technology has become increasingly miniaturized, and along with computing power, more available. Measurement error is reduced to a minimum with advanced tracking algorithms and post-processing. Several different sensing mechanisms can track sufficient motion leading to wide variety of uses in autonomous systems. Essentially motion is recorded by tracking the precise position and orientation of points of interest at high frequency. Each tracker uses fundamentally different physical principles to measure position and orientation. Mechanisms vary from using a multiplexed reading of orthogonal magnetic fields from inductive coils, accelerometers and gyroscopes, intensity of ultrasonic pulses, the mechanical orientation of joints, or a reconstruction of the position of visible markers detected with multiple cameras. This results in systems with varying capabilities and susceptibilities, such as occluded trackers, constrained motion or magnetic disturbances.

For robotic and automation applications include surveillance and human interaction, which requires a form of identity or action recognition [39][5], teleoperation [23], robot programming by demonstration [8][2] or humanoid imitation [26].

Apart from sensing motion and collecting data, research in recent years has focused on methodologies in handling large high dimensional data sets which arise from multiple sensors. Ultimately the sensing leads to classification or to controlling an external device, through the use of a range of analysis techniques from machine learning.

The purpose of this review paper is to collate a compendium of recent approaches to human motion tracking in the context

of robotic research in order to highlight potential advantages of each sensing mechanism. It is important to track progress in this area since the technology is new and changes quickly especially for current trends in analysis methodology. This paper describes various research and commercial tracking technology, their implementation and significance in robotic research and briefly describes some current analysis of large data sets produced by these pervasive technologies.

The paper is organised as follows. Firstly, a description of previous surveys and where this paper fits is discussed, section II outlines the various tracking technology available grouped by the sensing mechanism. Section III describes in further detail the applications in robotics that have risen out of these technologies. Section IV shows a comparison of the features of the sensors. Section V displays experimentation with an inertial motion capture system and section VI concludes the paper.

A. Previous surveys

There have been few surveys of motion tracking sensors in recent years. [40] gave a tutorial on sensing technology range and focused on augmented reality applications. The most comprehensive is [24] which is primarily focused on advances in image processing for markerless motion capture rather than considering wearable marker motion tracking. However, significant motion capture advances were also summarised including a number of analyses of motion capture data. There have been a number of other vision based surveys which devote minimal attention to wearable sensors [15].

Other reviews make sparse references to previous work in the robotics field. This review is intended to provide a targeted approach and specifically summarize recent approaches of motion tracking in robotics. Various analysis methodologies are compared in terms of their benefits and limitations.

II. TRACKING TECHNOLOGIES

Available tracking techniques have been categorised based upon the working principle. Although markerless motion analysis is a highly active research area, this paper focuses more on the use of wearable sensing in a robotics context.

Each motion tracking system has advantages that are useful depending on the application. Table I lists the major features

of each type of sensor system and references some researchers using the technology in robotics or automation.

A. Optical - Passive Marker

Optical detection with passive markers, or reflective indicators, uses multiple fixed high speed cameras around the measurement area to triangulate a precise marker position. Infrared lighting allows the capture of high contrast images of the reflective markers up to 2kHz. At least two cameras at a time must capture a marker otherwise there are occlusion errors. Although markers cannot be differentiated from each other until post-processing analysis restores the correct path. This results set of unlabeled points in a three dimensional workspace that correspond to the kinematic structure of the subject.

These optical systems are affected by instances of occluded markers but successful recordings have sub-millimeter errors. Redundant markers are often used to overcome occlusions which reduces the probably of error but increasing the number of markers also increases the processing latency. An advantage for passive marker systems is that the subject is not weighed down with battery packs or constrained by wires to sensors. Some significant disadvantages include portability and the measurement workspace, which is a small fixed area in view of the cameras. The area can be increased but this is still limited by the space in an indoor venue and strength of the reflected light.



Fig. 1. Vicon motion capture system. Cameras in corner of room (red lights), markers on the actors body [35]. Xsens Moven [13]. On the right is robot imitation with inertial sensors [23]. Below right is the SARCOS robot imitate person in mechanical motion suit and below left is a hybrid inertial and acoustic motion suit [37].

B. Optical - Active Marker

Active optical markers act as a light source instead of a reflector and are often deployed as infrared emitting diodes (IREDs). The light emission from markers is multiplexed and therefore the frequency of the camera speed is divided by the numbers of sensors to detect. Although this introduces a limitation on measurement frequency, less post-processing required since individual LEDs can be identified.

Once again the capture is limited by the arrangement of cameras and the field of view. The measurement area is typically in the order of several square meters, and theoretically higher than for passive systems because of the light intensity diminishing with inverse square of distance. Since the indicators are powered, for wireless recording the subject must wear power packs and secure wires that would otherwise impede motion.

C. Optical - Markerless

Ideally motion capture would only use one set of camera(s) from one angle, similar to human vision, without requiring any body markers. Although these vision-based processing techniques are a topic of research the only accurate systems are confined to a restricted area and background, generally provide inaccurate estimates or require cameras from multiple viewing angles. Due to the extensive research in vision-based processing a more in depth survey targeting this research can be found in [24][15].

Markerless motion capture is an ongoing research area with massive potential. It relies upon image segmentation and processing techniques to find a human posture which may be matched to a human template [36]. Common approaches employ background scene subtraction techniques to extract a silhouette [22] and various manifold learning algorithms [12].

D. Inertial

Inertial motion capture relies on acceleration and rotational velocity measurements from triaxial accelerometers and gyroscopes. Each inertial sensor positioned at strategic points on the body measures precise orientation to within 2° RMS [10]. This is achieved with estimation techniques such as Kalman filtering [31] fusing the angular rate with incline (gravity vector) and, for some sensors, magnetometers for more reliable heading data. Assuming certain configuration for the sensors and calibrating the actor dimensions an accurate posture can be resolved.

A major drawback of these sensors is estimating the position by integrating accelerations or angular velocity, a cumulative error arises, referred to as drift. Modern inertial motion capture suits rely upon ground contact force detection, indicated by sudden foot accelerations, to update reference position. Without well defined events such as these the posture remains accurate but tracking world position is unreliable due to drift. Other limitations include the need for post-processing in uncertain environments, when the ground support is varying dramatically.

Despite inherent problems associated with this technique it is improved in combination with other technology. [37] used inertial sensors with ultrasonic detection for a practical outdoor capture technique. With one optical marker the suit may be tracked accurately within the camera workspace.

E. Magnetic

Electromagnetic fields are established through precise current pulses in mounted transmitting antennae. Each magnetic

field including the earth magnetic field is measured giving an estimation of joint position, angles and global orientation. AC electromagnetic systems are highly distorted by neighbouring metallic objects but recent DC magnetic field systems exhibit significantly reduced distortion.

A triaxial transmitter produces DC pulses sequentially to each axis and the receiving antennae, mounted on significant positions on the body, measure the magnetic field along each axis. The earth magnetic field is measured when no pulse is present and subtracted when measuring the orientation. This results in 6DOF position and orientation information for each sensor up to a range of 10 ft from the transmitter.

Advantages of this approach include the flexibility in locating the sensors on the body, there are no occlusion issues. The measurement area is limited to a small region around the transmitter, comparable to optical systems, and is as portable as the transmitter. Metallic objects still cause a significant level noise and distortion to measurements.

F. Mechanical

The simplest method of capturing pose is to measure orientation directly using electromechanical potentiometers measuring the orientation displacement of each joint. This approach is effective in many cases since it is not affected by external forces or occlusions, measurements can be fast and the equipment portable. The main disadvantage is that motion is usually constrained by the rigidity of the wearable equipment. An exo-skeletal frame normally imposes restrictions on the range of motion since human joints are more flexible than the mechanical links. Another problem is in detecting the true position and orientation of the entire frame. This mechanism cannot detect events such as jumping or turning, only the relative angle between limbs. Therefore captured results appear to slide, a problem that can be overcome by incorporating other measurement techniques. This method is particularly strong in exoskeletal frames and prosthetics since the joints must also be powered.

G. Acoustic

By attaching ultrasonic transmitters and microphones at specific locations on a moving body an estimate of position can be determined through the intensity of acoustic pulses. The pulses are multiplexed so that each microphone measures the pulse intensity from each transmitter to estimate the relative distances between all sensor points.

A complication arising from this arrangement is self-occlusion, that is, parts of the moving body blocking a direct path to receiving microphones. It is especially difficult with partial occlusions since the reduced intensity should not be related to distance. Depending on the frequencies used the system is susceptible to background noises, temperature and humidity in uncertain environments, and to wind when used outdoors.

III. APPLICATIONS

Some of the major research applications of motion capture in robotics include programming by demonstration, imitation,

tele-operation, activity or context recognition and humanoid designs. In Table II, significant methods used in analysing the motion data are compared.

A. Programming by Demonstration / Imitation

Robot programming by demonstration has a relatively long history. Research into faster programming of industrial robots has extended to imitative robotics in recent years by using motion capture technology and machine learning. Initially demonstrated trajectories could be followed by extracting key points or way points for the end effector allowing a demonstrator to show a particular path and the robot to follow by targeting the key points [25]. This resulted in a brittle control scheme where a robot could replicate motions but would fail in a different context.

Further research advances from following trajectories to learning and generalisation of motor manipulation skills, to imitate humans in a flexible manner. Motion is still often assumed to be composed of an arrangement of more primitive components, or motion primitives. A range of stochastic models and sequencing algorithms are typically used to learn motion primitive and generate suitable trajectories.

A common stochastic model for analysing human motion is the Hidden Markov Model (HMM) [18]. A number of HMM states were trained on motion capture sequences such that each state embodied a posture for the robot. States were compared in a 'proto-symbol' space and merged based on their relative Kullback-Leibler distances. [21] expanded upon this framework by incrementally updating the model and creating a hierarchy of HMM sequences using Factorial HMM (FHMM).

Another method is to transform high dimensional data into a low dimensional manifold using analyses such as Principal Component Analysis (PCA) or non-linear methods such as Isomap and Gaussian Process Latent Variable Model (GPLVM) which have shown higher performance in capturing relevant data structure. Non-linear dimension reduction techniques as used by [38] embed the data onto meaningful planes of motion style and content with relatively small data sets. Their methods based on GPLVM could sample from regions of the latent space where there were no observed data. This algorithm has also been implemented in humanoid imitation [33] by projecting data from the latent space on the robots reduced DOF.

[8] used an arrangement of inertial motion trackers on the upper body to capture arm and torso motion. Over many demonstrations the data was compressed by a PCA pre-processing step and clustered similar postures into a GMM of a size determined using the Bayesian Information Criterion (BIC). Generalized trajectories could be restored and reproduced in a humanoid in different contexts by using Gaussian Mixture Regression (GMR) between the appropriate sequence of states.

There has been full body humanoid imitation [30] captured human motions with an optical passive marker system and translated the angles into a frame to replay motion. [26] used human motion capture of a traditional dance to control a

TABLE I
FEATURES OF EACH TECHNIQUE.

Method	Advantages	Disadvantages	References
Optical - Passive	<ul style="list-style-type: none"> · Precision < 1mm · Wireless · Less burden · 	<ul style="list-style-type: none"> · Position only · Limited measurement space · Occlusions · Post-processing latency 	[11][33][18] [21][12]
Optical - Active	<ul style="list-style-type: none"> · Precision < 1mm · Wireless · Higher range than passive 	<ul style="list-style-type: none"> · Position only · Limited measurement space · Occlusions · Post-processing latency · F_s divided among sensors · Burdened by wires on body 	
Optical - Markerless	<ul style="list-style-type: none"> · Wireless-Outdoor · Flexible · No sensor burden · Contextual information 	<ul style="list-style-type: none"> · High noise · Occlusions · High post-processing cost · Generally not real-time · High sensitivity to lighting 	[3]
Inertial	<ul style="list-style-type: none"> · Accelerations · Precision < a degree · Wireless - outdoor · Fast calibration · Portable 	<ul style="list-style-type: none"> · No reference position · Post-processing - external contacts · Noise · Magnetic disturbances 	[8][13][23] [37][39]
Mechanical	<ul style="list-style-type: none"> · Portable · Wireless-outdoor · Robust, reliable 	<ul style="list-style-type: none"> · Restrictive movement · No reference position · Relative orientation only 	[17]
Magnetic	<ul style="list-style-type: none"> · Portable · Wireless-outdoor · Flexible sensor arrangement 	<ul style="list-style-type: none"> · Limited range · No reference position · Magnetic disturbances 	[28]
Acoustic	<ul style="list-style-type: none"> · Portable · Wireless-outdoor · Flexible sensor arrangement 	<ul style="list-style-type: none"> · Partial occlusions · No reference position · Environmental conditions 	[37]

complete humanoid, while [27] transferred modified human motion capture data into humanoid simulations.

[7] and [1] provide a good reviews of robotic imitation approaches.

Direct real-time mapping of human motion to robots has many applications in teleoperation tasks. Miller [23] used a set of inertial sensors to control the robot arm of NASA Robonaut. Only 3 sensors were used for untethered control.

B. Activity Recognition

Understanding observations is an important aspect of autonomous systems and a significant amount of research in recent years has been devoted to identifying people and classifying their actions, as evident in surveys [24]. The action recognition problem has been pursued by researchers from many disciplines due to significant potential applications but research especially with video sequences is still in its infancy [22].

[39] uses a few inertial sensors and microphones placed on one arm to identify activities within a greater task. This is for the purposes of assistant computing which recognises, given the context of the measurements, what task is being performed. It can therefore provide relevant information, for instance, an assembly manual in a manufacturing or workshop environment as used in the paper. [41] used similar approaches in automotive repair environment.

Behaviour segmentation is also a recurring theme in computer animation research. [5] mined motifs in large motion

capture databases by clustering posture using k-means to create structured graphs which can blend fluid animations. Segmentation techniques were also evaluated by [4] for automating motion capture editing, the most successful approach involved Probabilistic PCA (PPCA) and Mahalanobis distance thresholding to segment plausible actions.

C. Humanoid Design

Motion capture measurements are an important resource for humanoid interactions and learning. Observations of human actions are a major influence in humanoid robot designs. This ranges from informing stable bipedal designs, energy conservation of actions to learning control actions in stabilization.

Motion capture has led to translating human gaits into humanoid motion by adapting the trajectory guided by the ZMP constraint [11] or by compensating for the angular velocity of the pelvis to stabilise the frame [27].

Other research in constructing stable, efficient robotic frames have been influenced by biomechanics research which in turn uses motion capture. [9] constructed mechanical biped frames that could walk passively down a small incline. This demonstration led to increased study of the mechanical design of walking bipeds [16] including conclusions from biomechanics.

IV. EXPERIMENTAL RESULTS WITH MOTION CAPTURE

At the University of Wollongong we have experimented with an inertial motion capture system from Xsens Technolo-

TABLE II
BENEFITS AND LIMITATIONS OF EACH METHODOLOGY.

Methodology	Benefit	Limitations	References
Key framing -	<ul style="list-style-type: none"> · Simplicity · Low memory consumption 	<ul style="list-style-type: none"> · No model of process · Cannot sample unobserved space 	[25]
Clustering - GMM	<ul style="list-style-type: none"> · Probabilistic model · Incremental model · Fewer parameters · Symbolic 	<ul style="list-style-type: none"> · Model density uncertain in high dimension thereby difficult to train · Explicit dynamics 	[8][13]
Clustering - HMM	<ul style="list-style-type: none"> · Probabilistic model · Implicit dynamics · Incremental model · Symbolic 	<ul style="list-style-type: none"> · Poor trajectory generation · Model density uncertain · High parameter count 	[18][21][39]
Clustering - K-means	<ul style="list-style-type: none"> · Simple Euclidean separation · Fast processing · Low memory consumption 	<ul style="list-style-type: none"> · No model of process · Not probabilistic i.e. cannot sample 	[5]
PCA	<ul style="list-style-type: none"> · Fast processing · Simple to implement · Used as pre-process 	<ul style="list-style-type: none"> · Reliant on variance · Linear mapping to latent variables 	[8]
Non-linear dimension reduction (Isomap, GPLVM etc.)	<ul style="list-style-type: none"> · Non-linear mapping · Probabilistic model · Generalize with minimal data 	<ul style="list-style-type: none"> · Difficult to compare latent model · Computation cost · Interpreting mapping 	[19][33][38]
Connectionist	<ul style="list-style-type: none"> · Biological premise · Prediction performance 	<ul style="list-style-type: none"> · Require large data sets · Model 	

gies in action recognition for applications such as surveillance, computer interaction or humanoid control planning. The approach involves clustering the posture into a GMM to determine a model of key states, a further segmentation using a variety of techniques is geared towards separating recognisably different behaviours. With this technique a layered hierarchy is formed which separates behaviours and their subcomponents as illustrated in Figure 2. In this framework predictions of observed actions can be made based on subcomponents to predict the observed activity and could be translated to robot frames where further learning and control would deal with separate dynamics.

In [14] it was shown that removing less abundant clusters from the GMM hinder identification of the activity and is detrimental to a stable center of mass trajectory in possible robot motions. In [13] recognisable behaviour was segmented with a range of techniques and compared to subjective segmentations. A close relationship was shown between the algorithm segmentation and human judgement. These techniques may work towards recognising particular activities, discovering anomalous behaviour or assisting humanoid imitation planning.

V. CONCLUSION

Recent applications of motion tracking technology in robotics have been presented. The various advantages and disadvantages of each sensor mechanism are compared revealing inherent limitations of the technology. Every sensor has drawbacks but some combined sensor applications appear to overcome these problems to some extent. The relevance of motion capture for robotics was discussed and some current techniques in data analysis were outlined to illustrate the difficulty in handling this data rich sensor technology. The trend in methodology is towards stochastic machine learning techniques such as HMM or GMM and non-linear dimension

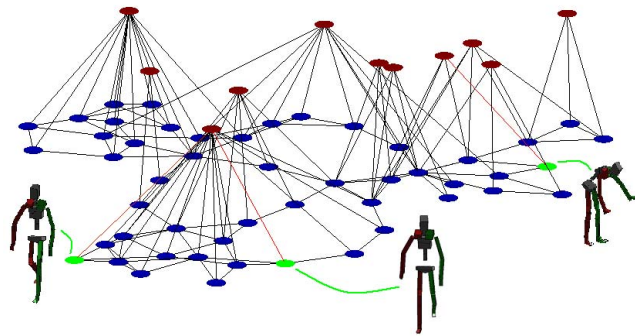


Fig. 2. Gaussian mixture states (blue) in a FSM and the segmented behaviours (red) connected to their key states. Illustrated states are highlighted green.

reduction. The resulting empirical models tend to handle uncertainty well and are suitable for incrementally updating models. Finally, some recent experimental work using an inertial motion capture system is outlined along with the methodology employed to analyse the data.

Markerless motion capture is undeniably important for future robotics and automation research, however robot learning even with accurate motion capture is limited. Among the challenges in human-robot interaction today include expanding upon generalising motions to understanding motion planning and decisions and building ultimately context aware systems. The technology outlined in this survey provides sufficient data to approach the problem. Methodologies in handling the data are generally limited in their scope and application.

REFERENCES

- [1] Brenna D. Argall, Sonia Chernova, Manuela Veloso, Brett Browning. A survey of robot learning from demonstration. *Robotics and Autonomous Systems*, Volume 57, Issue 5, 31 May 2009, Pages 469-483, ISSN 0921-8890, DOI: 10.1016/j.robot.2008.10.024.

- [2] Azad, P.; Asfour, T.; Dillmann, R. Toward a Unified Representation for Imitation of Human Motion on Humanoids. In *IEEE International Conference on Robotics and Automation 2007*, vol., no., pp.2558-2563, 10-14 April 2007.
- [3] Azad, P.; Ude, A.; Asfour, T.; Dillmann, R. Stereo-based Markerless Human Motion Capture for Humanoid Robot Systems. In *IEEE International Conference on Robotics and Automation 2007*, vol., no., pp.3951-3956, 10-14 April 2007.
- [4] Barbic, J., Safonova, A., Pan, J., Faloutsos, C., Hodgins, J. K., and Pollard, N. S. Segmenting motion capture data into distinct behaviors. In *Proceedings of Graphics interface*, p. 185-194, London, Ontario, Canada, May 17-19, 2004.
- [5] P. Beaudoin, M. van de Panne, P. Poulin, and S. Coros. Motion-Motif Graphs. *Proc. Symposium on Computer Animation 2008*, To appear, July 2008.
- [6] Aude Billard, Yann Epars, Sylvain Calinon, Stefan Schaal, Gordon Cheng. Discovering optimal imitation strategies. *Robotics and Autonomous Systems*, Volume 47, Issues 2-3, , Robot Learning from Demonstration, 30 June 2004, Pages 69-77.
- [7] A. Billard, S. Calinon, R. Dillmann and S. Schaal Robot programming by demonstration. In: *B. Siciliano and O. Khatib, Editors, Handbook of Robotics*, Springer, New York, NY, USA (2008) (Chapter 59).
- [8] S. Calinon, F. Guenter, and A. Billard. On learning, representing and generalizing a task in a humanoid robot. *IEEE Transactions on Systems, Man and Cybernetics: Part B*, Vol. 37, No. 2, pp. 286-298, 2007.
- [9] Collins, S.H., Ruina, A.L., Tedrake, R., Wisse, M. Efficient bipedal robots based on passive-dynamic Walkers. *Science*, 307: 1082-1085.
- [10] Adrea Giovanni Cutti, Andrea Giovanardi, Laura Rocchi, Angelo Davalli. A simple test to assess the static and dynamic accuracy of an inertial sensors system for human movement analysis. In *Proceeding of the 28th IEEE EMBS Annual International Conference*, pages 1002-1009, New York City, USA, August 30th - September 3rd, 2006.
- [11] Dasgupta, A.; Nakamura, Y. Making feasible walking motion of humanoid robots from human motion capture data. In *Proceedings of 1999 IEEE International Conference on Robotics and Automation*, vol.2, no., pp.1044-1049 vol.2, 1999.
- [12] Elgammal, A.; Chan-Su Lee. Tracking People on a Torus. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol.31, no.3, pp.520-538, March 2009.
- [13] Field, M.; Stirling, D.; Naghdy, F.; Pan, Z. Motion Segmentation for Humanoid control planning. *ARAA Australasian Conference on Robotics and Automation, 2008. ACRA '08*, 3-5 December. 2008.
- [14] Field, M.; Stirling, D.; Naghdy, F.; Pan, Z. Mixture Model Segmentation for Gait Recognition. *Learning and Adaptive Behaviors for Robotic Systems, 2008. LAB-RS '08. ECSIS Symposium on*, vol., no., pp.3-8, 6-8 Aug. 2008.
- [15] Weiming Hu; Tieniu Tan; Liang Wang; S. Maybank. A survey on visual surveillance of object motion and behaviors. *Systems, Man, and Cybernetics, Part C: Applications and Reviews, IEEE Transactions on*, vol.34, no.3, pp.334-352, Aug. 2004.
- [16] Qiang Huang; Zhaoqin Peng; Weimin Zhang; Lige Zhang; Kejie Li. Design of humanoid complicated dynamic motion based on human motion capture. *Intelligent Robots and Systems, 2005. (IROS 2005). 2005 IEEE/RSJ International Conference on*, vol., no., pp. 3536-3541, 2-6 Aug. 2005.
- [17] A.J. Ijspeert, J. Nakanishi, S. Schaal. Movement imitation with nonlinear dynamical systems in humanoid robots. in: *Proceedings of the IEEE International Conference on Robotics and Automation, ICRA02*, 2002.
- [18] Inamura, T., Toshima, I., Tanie, H. and Nakamura, Y. Embodied symbol emergence based on mimesis theory. *International Journal of Robotics Research*, 23(4-5): pp. 363-377, 2004.
- [19] O. Jenkins, G. Gonzalez, and M. Loper. Interactive human pose and action recognition using dynamical motion primitives. In *International Journal of Humanoid Robotics*, 4(2):365-385, Jun 2007.
- [20] Katic, D. and Vukobratovic, M. Survey of Intelligent Control Techniques for Humanoid Robots. In *Journal of Intelligent Robotics Systems*, 37, 2 (Jun. 2003), 117-141.
- [21] D. Kulic, J. W. Takano, and Y. Nakamura. Incremental Learning, Clustering and Hierarchy Formation of Whole Body Motion Patterns using Adaptive Hidden Markov Chains. *International Journal of Robotics Research*, Vol. 27, No. 7, pp. 761-784, 2008.
- [22] W. Li; Z. Zhang; Z. Liua. Expandable Data-Driven Graphical Modeling of Human Actions Based on Salient Postures. *Circuits and Systems for Video Technology, IEEE Transactions on*, vol.18, no.11, pp.1499-1510, Nov. 2008.
- [23] Miller, N.; Jenkins, O.C.; Kallmann, M.; Mataric, M.J. Motion capture from inertial sensing for untethered humanoid teleoperation. *4th IEEE/RAS International Conference on Humanoid Robots*, vol.2, no., pp. 547-565 Vol. 2, 10-12 Nov. 2004.
- [24] Moeslund, T. B., Hilton, A., and Krger, V. A survey of advances in vision-based human motion capture and analysis.. In *Computer Vision and Image Understanding*, Volume 104, Issue 2 (Nov. 2006), pages 90-126.
- [25] Muench, S.; Kreuziger, J.; Kaiser, M.; Dillmann, R. Robot programming by demonstration (RPD) - Using machine learning and user interaction methods for the development of easy and comfortable robot programming systems. In *Proceedings of the International Symposium on Industrial Robots (ISIR)*, pages 685-693, 1994.
- [26] Nakaoka, S.; Nakazawa, A.; Yokoi, K.; Ikeuchi, K. Leg motion primitives for a dancing humanoid robot. *Proceedings. ICRA '04. 2004 IEEE International Conference on Robotics and Automation, 2004*, vol.1, no., pp. 610-615 Vol.1, 26 April-1 May 2004.
- [27] N. Naksuk, G. Lee, S. Rietdyk. Whole-Body Human-to-Humanoid Motion Transfer. *Proceedings of 2005 5th IEEE-RAS International Conference on Humanoid Robotics*, 104-109, 2005.
- [28] Kim Doang Nguyen; I-Ming Chen; Song Huat Yeo; Been-Lirn Duh. Motion Control of a Robotic Puppet through a Hybrid Motion Capture Device. *Automation Science and Engineering, 2007. IEEE International Conference on*, vol., no., pp.753-758, 22-25 Sept. 2007.
- [29] Oztop, E., Kawato, M., and Arbib, M. Mirror neurons and imitation: a computationally guided review. *Neural Networks*, 19, 3 (Apr. 2006), 254-271.
- [30] N. S. Pollard, J. K. Hodgins, M. J. Riley, and C. G. Atkeson. Adapting Human Motion for the Control of a Humanoid Robot. *Proceedings of the IEEE International Conference on Robotics and Automation*, vol.2, no., pp. 1390-1397, Washington, D.C., May 2002.
- [31] Roetenberg. Towards a Real-Time Bayesian Imitation System for a Humanoid Robot. *2007 IEEE International Conference on Robotics and Automation*, vol., no., pp.2847-2852, 10-14 April 2007.
- [32] Schaal S, Ijspeert A, Billard A. Computational Approaches to Motor Learning by Imitation. In *Philosophical Transaction of the Royal Society of London: Series B, Biological Sciences*, 358(1431):537-547, 2003.
- [33] A. P. Shon, K. Grochow, A. Hertzmann and R. P. N. Rao. Learning shared latent structure for image synthesis and robotic imitation. *Advances in Neural Information Processing Systems*, in Y. Weiss, B. Scholkopf and J. C. Platt (eds), MIT Press, Cambridge, MA, 2005.
- [34] Shon, A.P.; Grochow, K.; Rao, R.P.N. Robotic imitation for human motion capture using Gaussian processes. *5th IEEE-RAS International Conference on Humanoid Robots, 2005*, pp. 129-134, Dec. 5, 2005.
- [35] Shon, A.P.; Storz, J.J.; Rao, R.P.N. Towards a Real-Time Bayesian Imitation System for a Humanoid Robot. *2007 IEEE International Conference on Robotics and Automation*, vol., no., pp.2847-2852, 10-14 April 2007.
- [36] Sigal, L., Balan, A., Black, M. HumanEva: Synchronized Video and Motion Capture Dataset and Baseline Algorithm for Evaluation of Articulated Human Motion. *International Journal of Computer Vision*, August, 2009.
- [37] Vlasic, D.; Adelsberger, R.; Vannucci, G.; Barnwell, J.; Gross, M.; Matusik, W.; Popovic, J. Practical Motion Capture in Everyday Surroundings. *ACM Transactions on Graphics*, 26(3), 2007, pages 35:1-35:9.
- [38] Wang, J.M., Fleet, D.J., Hertzmann, A. Gaussian Process Dynamical Models for Human Motion. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol.30, no.2, pp.283-298, Feb. 2008.
- [39] J. A. Ward, P. Lukowicz, G. Troster, and T. Starner. Activity recognition of assembly tasks using body-worn microphones and accelerometers. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol.28, no.10, pp.1553-1567, Oct. 2006.
- [40] Welch, G., Foxlin, E. Motion tracking: no silver bullet, but a respectable arsenal. *Computer Graphics and Applications*, 22, 6 (Nov./Dec.), 2438.
- [41] Zappi, P.; Stiefmeier, T.; Farella, E.; Roggen, D.; Benini, L.; Troster, G. Activity recognition from on-body sensors by classifier fusion: sensor scalability and robustness. *Intelligent Sensors, Sensor Networks and Information Processing, 2007. 3rd International Conference on*, vol., no., pp.281-286, 3-6 Dec. 2007.