



UNIVERSITY
OF WOLLONGONG
AUSTRALIA

University of Wollongong
Research Online

Faculty of Science - Papers (Archive)

Faculty of Science, Medicine and Health

2010

Hydrogel electrode materials

Marc in het Panhuis

University of Wollongong, panhuis@uow.edu.au

Publication Details

in het Panhuis, M. (2010). Hydrogel electrode materials. 2010 Conference on Optoelectronic and Microelectronic Materials and Devices, COMMAD 2010 (pp. 31-32).

Research Online is the open access institutional repository for the University of Wollongong. For further information contact the UOW Library:
research-pubs@uow.edu.au

Hydrogel electrode materials

Abstract

The fabrication of hydrogel electrode materials via inkjet/extrusion printing, wet-spinning and physical cross-linking will be presented. Electrode characteristics such as conductivity, contact resistance, impedance and electrode connectivity will be discussed in detail.

Keywords

materials, hydrogel, electrode

Disciplines

Life Sciences | Physical Sciences and Mathematics | Social and Behavioral Sciences

Publication Details

in het Panhuis, M. (2010). Hydrogel electrode materials. 2010 Conference on Optoelectronic and Microelectronic Materials and Devices, COMMAD 2010 (pp. 31-32).

Hydrogel electrode materials

M. in het Panhuis*

Soft Materials Group, School of Chemistry, University of Wollongong, Wollongong, NSW 2522, Australia

*Corresponding author: Email panhuis@ouw.edu.au

Abstract: The fabrication of hydrogel electrode materials via inkjet/extrusion printing, wet-spinning and physical cross-linking will be presented. Electrode characteristics such as conductivity, contact resistance, impedance and electrode connectivity will be discussed in detail.

1 Introduction: Nanobionics: the merging of biology and electronics using the most recent advances in nanotechnology will play a significant role in the future development of medical implants and prosthetic devices. The realisation of novel material platforms that facilitate nerve cell regeneration, can control muscle cell regrowth, or that act as efficient platforms for endothelial cell growth is envisaged. In addition, the development of artificial muscle fibres for use in wearable prosthetics will benefit from advances in nanotechnology and the development of bio-composite materials.

The field of Bionics has to date been dominated by the use of traditional conductors such as metals and by traditional electromechanical devices such as motors. The advent of organic conductors (such as carbon nanotubes) with the emergence of nanotechnology will revolutionize the field of Bionics, enabling us to more effectively bridge the chasm that currently epitomizes the interface between biology and electronics. However, carbon nanotubes (CNTs) alone will not provide the blend of biological, mechanical and electronic properties required for the next generation of Bionics.

CNTs possess unique electronic and mechanical properties [1]. A key challenge in exploiting these phenomenal properties is to overcome practical difficulties in processing them from their as-produced state. These difficulties arise as a result of the hydrophobic nature of CNTs and associated strong attractive interactions between adjacent CNTs [2]. Considerable effort is currently being directed towards combining polymers and

carbon nanotubes into composites with unprecedented mechanical and electrical properties.

A range of biomaterials have proven suitable hosts for CNTs, and potentially provide the basis of highly effective material platforms for Bionics. Chitosan is used in single-polymer scaffolds, as it is structurally similar to the extracellular matrix component glycosaminoglycans and is biodegradable in humans [3]. Gellan gum is US FDA and European Union (E418) approved for food and medical usage, and has found wide application as a multifunctional gelling, stabilising and suspending agent as well as an emerging material for tissue engineering applications [4].

2 Results and Discussion: We report the formation of hydrogel electrode materials based on the addition of conducting carbon nanotube fillers to biopolymers. In particular, we will discuss three processing methods for fabricating conducting hydrogel materials: inkjet/extrusion printing, wet spinning and physical cross-linking.

Inkjet/extrusion printing has attracted interest for its potential in fabricating scaffolds for biomedical applications. A range of deposition systems was used to assemble soft material by sequential deposition of biopolymer solutions and CNT dispersions, followed by hydration to achieve a hydrogel. These deposition systems include a liquid handling system, a commercial printer, a syringe-controlled deposition system and a custom built inkjet printing system capable of dispensing inks from multiple reservoirs (similar to colour printing) [5-8].

Wet spinning is an attractive method used to produce micron-diameter fibres suitable for use in a range of biological applications. Conducting biopolymer-CNT-biopolymer fibers were prepared using our recently developed approach of polyelectrolyte complexation [9-11].

Physical cross-linking of a biopolymer solution via addition of cross-linking agents such as Ca^{2+} is a well established fabrication method for hydrogels. This technique has been applied to CNT dispersions [11-13].

The percolation behaviour of our CNT-laden hydrogels was investigated using a novel experimental technique utilising a custom, in-house designed apparatus for simultaneous measurements of hydrogel conductivity and mass [12]. Percolation studies (Fig. 1) revealed that a carbon nanotube concentration of 1.3% by weight is required to achieve electrical conduction through the hydrogel.

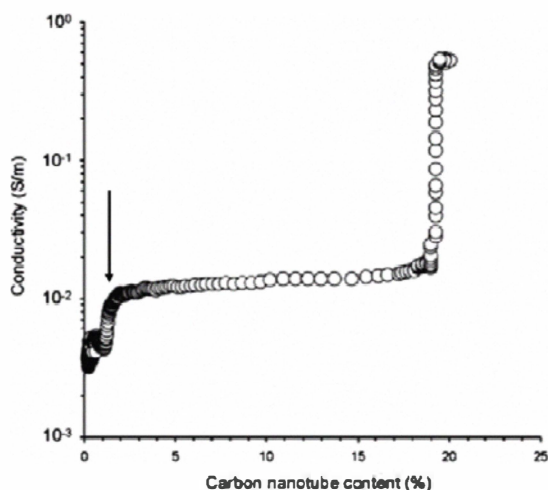


Fig. 1. Log of conductivity as a function a function of carbon nanotube content (% weight) for a gellan gum-CNT hydrogel. The arrow indicates the percolation threshold.

3 Conclusion: We envisage that these composite hydrogel electrode materials will be developed further into a means by which electrical signals may be propagated through conducting bio-materials. Unlike normal composites, the polymer matrix is an ionic conductor exhibiting a high conductivity below percolation. Hence at the threshold percolation the changeover is from ionic to electronic conduction, raising many interesting possibilities for sensors and other electrochemical devices.

Acknowledgements

This work has been supported by the University of Wollongong, Australian Research Council (ARC), and ARC Future Fellowship (M. in het Panhuis). CP Kelco is thanked for provision of materials.

References

- [1] R.H. Baughman, A.A. Zakhidov, and W.A. de Heer, "Carbon nanotubes – the route towards applications", *Science*, vol. 297, p 787, 2002.
- [2] M. in het Panhuis, "Carbon nanotubes: enhancing the polymer building blocks for intelligent materials", *J. Mater. Chem.*, vol 16, p 3598, 2006.
- [3] J.L. Drury, and D.J. Mooney, "Hydrogels for tissue engineering: scaffold design variables and applications", *Biomaterials*, vol. 24, p 4337, 2003.
- [4] A.M. Smith, R.M. Shelton, Y. Perrie, and J.J. Harris, "An initial evaluation of gellan gum as a material for tissue engineering applications", *J. Biomater. Appl.*, vol. 22, p 241, 2007.
- [5] M. in het Panhuis, et al, "Nanotube network transistors from peptide-wrapped single-walled carbon nanotubes", *Small*, vol. 1, p 820, 2005.
- [6] W.R. Small, F. Masdarolomoor, G.G. Wallace and M. in het Panhuis, "Inkjet deposition and characterisation of transparent conducting electroactive polyaniline composite films with high carbon nanotube loading fraction", *J. Mater. Chem.*, vol. 17, p 4359, 2007.
- [7] C.A. Mire, A. Agrawal, P. Calvert, G. Wallace, and M. in het Panhuis, "Inkjet and extrusion printed conducting poly(3,4 ethylenedioxythiophene tracks)", unpublished.
- [8] D. McCallum, C. Ferris, P. Calvert, M. in het Panhuis, and G.G. Wallace, "Printed hydrogel materials", unpublished.
- [9] A.J. Granero, J. M. Razal, G. G. Wallace and M. in het Panhuis, "Spinning carbon nanotube-gel fibers using polyelectrolyte complexation", *Adv. Funct. Mater.*, vol 18, p 3759, 2008.
- [10] A.J. Granero, J.M. Razal, G.G. Wallace, and M. in het Panhuis, "Conducting gel-fibres based on carrageenan, chitosan and carbon nanotubes", *J. Mater. Chem.*, vol 20, p 7953, 2010.
- [11] C.J. Ferris and M. in het Panhuis, "Gel-carbon nanotube composites: the effect of carbon nanotubes on gelation and conductivity behaviour", *Soft Matter*, vol. 5, p 1466, 2009.
- [12] C.J. Ferris and M. in het Panhuis, "Conducting bio-materials based on gellan gum hydrogels", *Soft Matter*, vol. 5, p 3430, 2009.
- [13] N. Songmee, P. Singjai and M. in het Panhuis, "Gel-carbon nanotube materials: the relationship between nanotube network connectivity and conductivity", *Nanoscale*, vol 2, p 1740, 2010.